Parts and Hardware List

ITEM NO:21946

Parts and Hardware List

A.	Wire Nut	3PCS
B.	Green Ground Screw	1PC
C.	Cross Bar	1PC
D.	Hex Nut	2PCS
E.	Pre-Threaded Pipe	1PC
F.	Outlet Box Screw	2PCS
G.	Canopy	1PC
H.	Pre-Threaded Ring	1PC
I.	Collar Loop	1PC
J.	Glass Shade	1PC
K.	Socket Ring	1PC

Please make sure that you have all the parts indicated before you begin assembly of this item

Please read Wiring Instructions before you begin assembling and installing your Chandelier

Assembly Instructions

1.Carefully remove the parts and hardware from the carton.
2. Fasten the Cross Bar (C) to the outlet box using the Outlet Box Screws(F).
3. Insert the shorter end of the Pre-Threaded Pipe (E) into the pre-dirlled hole in the Cross Bar(C) and secure with the Hex Nut(D).See Instruction.
4. Attach the Collar Loop (I) to the exposed end of the Pre-Threaded Pipe (E) and secure by turning in a clockwise direction.
5.Slip the Pre-Threaded Ring(H) first and then the Canopy (G) over the Collar Loop(I).
6. Screw the Lamp Body onto the Metal Tube A until tight.
7. Repeat the Step 6 with the Metal Tube B, C nd D.
8. Attach the Glass Shade(J) onto the socket and secure by the Socket Ring(K).
9.Install 60 Watt, Type A bulb (sold separately) into the socket of the fixture.

PO BOX 558/3325 GRASSY HILL RD. ROCKY MOUNT, VIRGINIA 24151
www.uttermost.com

MANUFACTURERS OF WALL DECOR, LIGHTING, DECORATIVE ACCESSORIES AND ACCENT FURNITURE
UTTERMOST

ILLUSTRATION

ITEM NO:21946





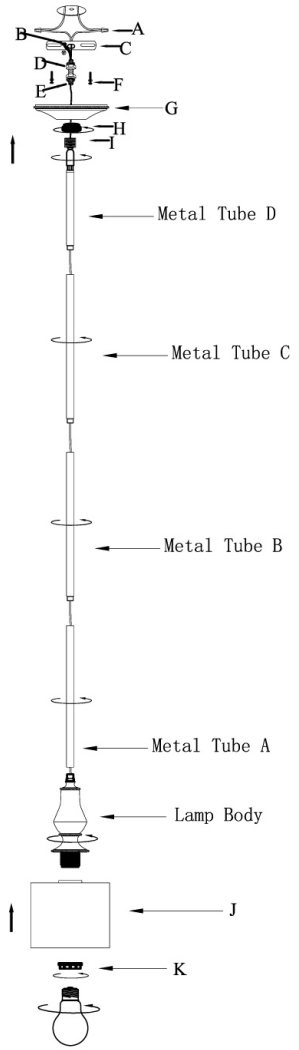

PO BOX 558/3325 GRASSY HILL RD. ROCKY MOUNT, VIRGINIA 24151
www.uttermost.com